

## Verdcol™ DL Yellow 14 GP

- Mid shade yellow
- For general purpose

<b>Colour Index</b>	Pigment Yellow 14
<b>C.I. No.</b>	21095
<b>CAS No.</b>	5468-75-7
<b>REACH Pre-Registration No.</b>	Available on Request

### Physical Data

Density[g/cm <sup>3</sup> ]	1.5~1.7
Specific Surface [m <sup>2</sup> /g]	35~40
Oil Absorption[g/100g]	≤40

### Application


PVC	●
PE/PP	○
PS	-
ABS	-
PA	-
PC	-
PUR	-
PET/PBT	-
Rubber	●
● : recommended	
○ : limited suitability	
- : not recommended	

### Fastness

Light	Weather	Migration (In PVC)	Acid	Alkali
4	-	4~5	5	5




Full Shade

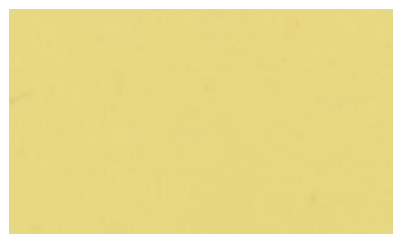

Tint 1:10 TiO<sub>2</sub>

### Heat Resistance (In HDPE)

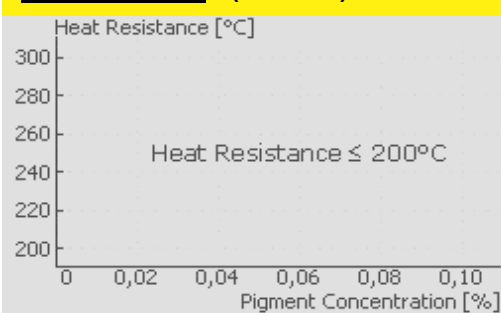

For more details, please contact [service@verdexinli.com](mailto:service@verdexinli.com)